


XOOM™ OUT IP40



XOOM™ OUT is a circular luminaire with an aerial design floating in time and space. The light shines outward its ring shape and floods its surrounding with elegance.

XOOM™ OUT complements any architectural concept with a graceful contrast of light and obscurity. Even though XOOM™ OUT expels light out of its core, its innovative light distribution creates a singular lighting effect.


Mounting types & dimensions

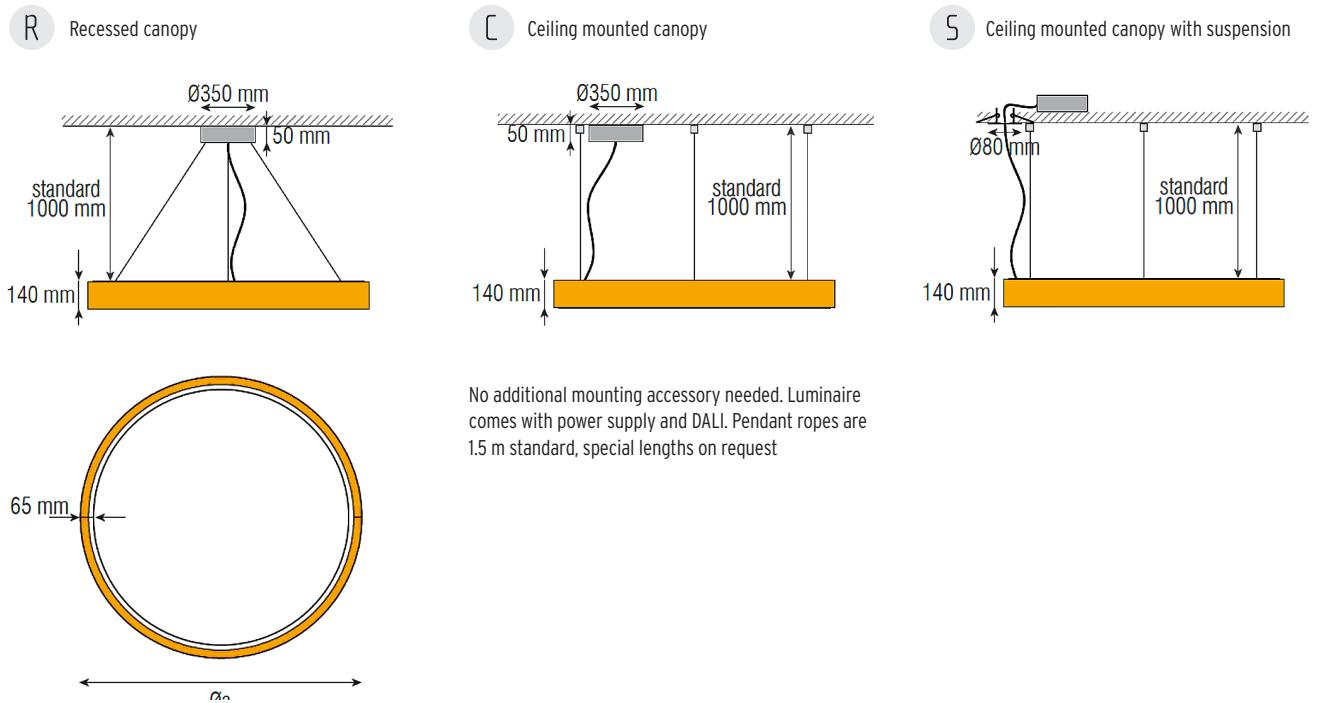

Voltage	24 Volt (23 V _{min} , 25 V _{max})
Temperature ²	T _c _{min} = -25°C, T _c _{max} = 60°C
Storage temperature	T _s _{min} = -30°C, T _s _{max} = 85°C
Ambient temperature	T _a _{min} = -25°C, T _a _{max} = 4°C
CRI	up to 85
R9	up to 25

XOOM-IN	Ø 1000 mm	Ø 1400 mm
Power (W) ¹	96	135
Efficacy (lm/W) ¹	80	80

Tape color temperature		Total luminaire lumen output (lm) ¹	
W825	2500 K	6300	8820
W827	2700 K	6680	9350
W835	3500 K	7090	9920
W840	4000 K	7610	10660



Lifetime

90/810 > 60.000 h

Photometric code

Wx27/ 339

Protection against granular objects > 0.034" / 1 mm



¹ The given data are typical values. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

² The T_c-point should be measured in thermal equilibrium according to IEC EN 60598-1.


► Preliminary datasheet

Order code


Your order code	XOOM OUT	W8 __	_____	—	—	—	C	IP40
Order code example	XOOM OUT	W830	1400	B	C	E	C	IP40
Color temperature								
2500 K	25							
2700 K	27							
3000 K	30	●						
4000 K	40							
Diameter								
1000 mm	1000							
1400 mm	1400	●						
Profile color (powder coating)								
Silver	S							
Black	B	●						
White	W							
Mounting option								
Recessed canopy	R							
Ceiling mounted canopy	C	●						
Ceiling mounted canopy with suspension	S							
Supply voltage								
220 - 240 VAC	E	●						
110 - 270 VAC	W							
Control option								
DALI (Standard)	C	●						
Ingress protection								
IP40	IP40	●						

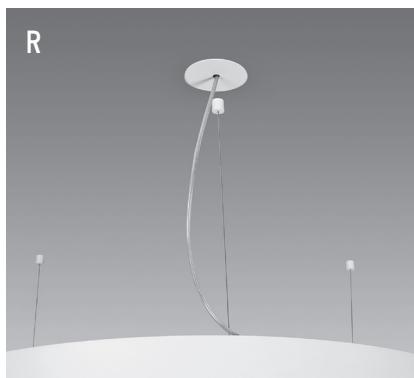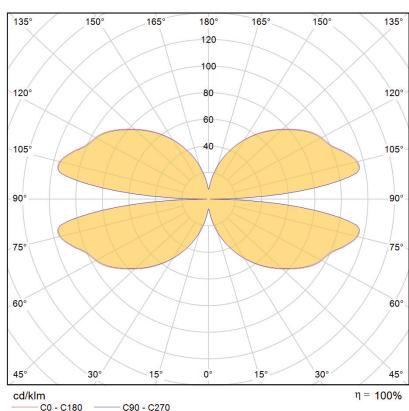

Canopy for recessed installation.
3 suspension points.

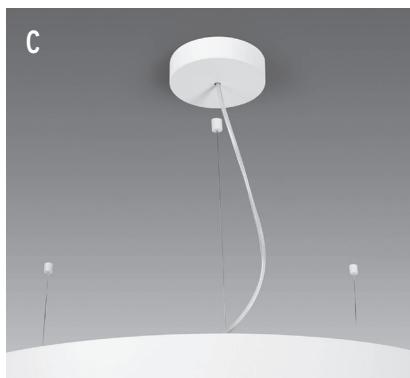

Canopy for ceiling installation.
3 suspension points.

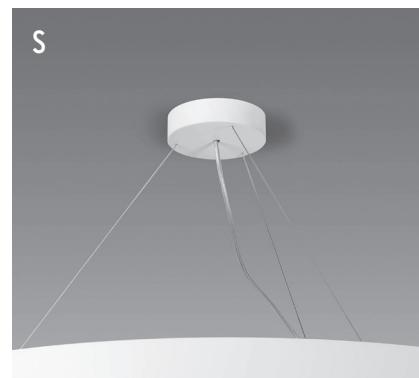

Canopy for ceiling installation,
suspension integrated.